


**NEXUS® Model 4 I/O DC
Battery Powered Controller**

CTR-X11.5-B-04 Series

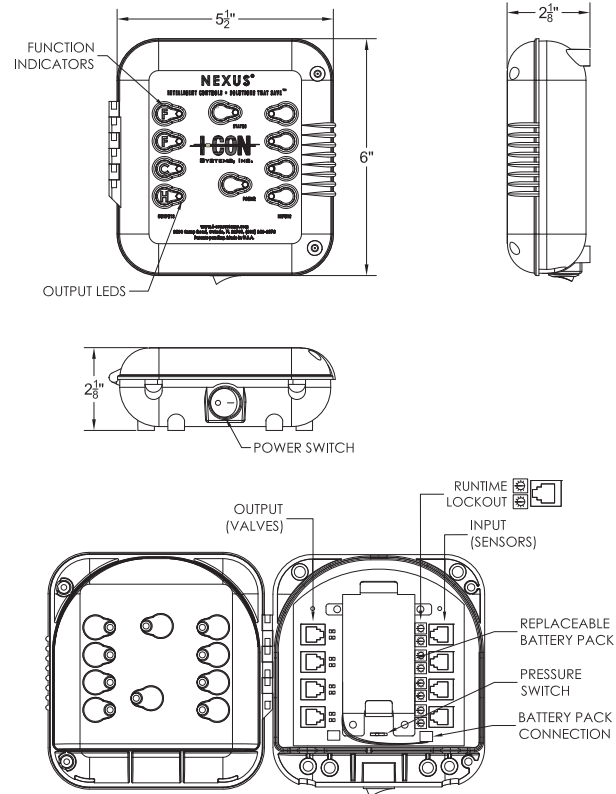

► **Description**

9VDC standalone Four Input/Four Output Electronic Controller used to control up to four sensors and valves. Dedicated potentiometers allow for field adjustable lockouts and runtimes.

► **Program Type** (choose one)

- | | |
|---|--------------------|
| <input type="checkbox"/> One Combie and One Shower | Port # 1234 (HCFS) |
| <input type="checkbox"/> One Combie and Flush | (HCFF) |
| <input type="checkbox"/> Four Watercloset | (FFFF) |
| <input type="checkbox"/> Four Showers | (SSSS) |
| <input type="checkbox"/> Two Lavatories | (HCHC) |
| <input type="checkbox"/> Special Order - Please Contact Factory | _____ |

► **Timing Adjustment Option** (choose one)

- Standard - Field Adjustable Lockouts & Runtimes
 Custom - Please Contact Factory

► **Accessories**

See Accessories Section of the I-CON catalog or contact our Customer Service Team for details.

Specifications

- Water Resistant Enclosure
- Specifically designed for penal use and other vandal prone areas to conserve potable water consumption
- Electrical telephone plug type connectors for sensor and solenoid
- UL Listed (E308296) and independently tested
- Power switch on the exterior of the housing
- Green LEDs illuminate at each port to show the port is active
- Red LEDs indicate block times are in effect
- 10+ years typical battery life at 35,000 uses per year* (1 use every 10 min, 16 hours a day, 7 days a week)

*actual battery life depends on usage, operating conditions and storage conditions.

This space is for Architect/Engineer approval



The information contained in this document is subject to change without notice.